

PU Torque T20 Steel

Article code: TBUT000400

General information

Productgroup	Timing belts, PU Torque
Industry segment	General industry; Wood; Building materials: Stone & ceramics, Bricks & tiles
Main product feature	Positive drive, Non-marking, Wear resistant

Belt construction

Tension member		steel
Material	body	Polyurethane
Surface	tooth side	Polyurethane
	back side	Polyurethane

Characteristics


Food Grade (FG)	no	
Antistatic (AS)	no	
Oil & Fat resistance	yes	

Technical data


Tooth	profile		T20	
	pitch		20 mm	0.79 in.
Hardness body material	ISO 868		92A Shore	
Belt thickness			8 mm	0.31 in.
Belt weight			7.7 kg/m ²	1.58 lbs/ft ²
Coefficient of friction	tooth side to steel	dynamic	0,5	
Operating temperature	continuous	from / to	-10 / 80 °C	14 / 176 °F
Minimum pulley diameter	A) without counter flexing	number of teeth, t1	15	
		d1	92.64 mm	3.65 in.
		d2	120 mm	4.72 in.
	B) with counter flexing	number of teeth, t1	25	
		d1	156.32 mm	6.15 in.
		d2	120 mm	4.72 in.
Belt width	maximum		150 mm	5.91 in.
Belt length	minimum		900 mm	35.43 in.
	maximum		25000 mm	82.02 ft.

Reference images


Side view

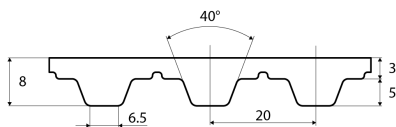

A) without counter flexing



B) with counter flexing



Fabrication

This information on the fabrication options is general, please contact Ammeraal Beltech to inquire for the specific fabrication possibilities of the timing belt of your choice.

Cleats welded or mechanically attached, metal teeth, guides welded or glued.

Covers can be welded, glued, coated or vulkanized onto the back side of the timing belt.

Thermoplastic covers can be embossed.

Perforations, lateral and longitudinal slots, lateral and longitudinal profiles.

Additional Information

Tooth profile according to standard: metric ISO 17396 , imperial ISO 5296-1, curvilinear ISO 13050, depending on the belt type.

This sheet contains typical values, which apply to a temperature of approx. 20 °C (68 °F), unless otherwise stated, individual data may differ.

Consult our specialists for further information like technical calculations. Instructions regarding joining, storage & maintenance and tracking & tensioning.

Standard belt width [mm]	Allow. tensile load Linear open end & Torque [N]	Allow. tensile load Linear welded endless [N]	Spring force [N]
25	3200	1600	870000
32	4100	2050	1130000
50	6500	3250	1760000
75	9800	4900	2630000
100	13500	6750	3500000
150.1	20000	10000	5000000

Speed rpm [1/min]	Specific tooth force [N/mm]	Specific power [W/mm]
0	10.45	0
25	10	0.083
50	9.69	0.161
75	9.35	0.234
100	9.14	0.305
150	8.74	0.437
200	8.35	0.557
300	7.78	0.778
400	7.34	0.979
500	6.95	1.158
750	6.33	1.183
1000	5.83	1.943
1250	5.39	2.246
1500	5.11	2.555
1750	4.84	2.823
2000	4.59	3.06
3000	3.84	3.84
4000	3.31	4.413

Standard