

PU Linear XH Aramid

Article code: TBPU000124

General information

Productgroup	Timing belts, PU Linear
Industry segment	General industry; Wood; Building materials: Stone & ceramics, Bricks & tiles
Main product feature	Positive drive, Wear resistant

Belt construction

Tension member		aramid
Material	body	Polyurethane
Surface	tooth side	Polyurethane
	back side	Polyurethane

Characteristics


Food Grade (FG)	no
Antistatic (AS)	no
Oil & Fat resistance	yes

Technical data


Tooth	profile			XH	
	pitch			22.225 mm	0.87 in.
Hardness body material	ISO 868			92A Shore	
Belt thickness	total			11.2 mm	0.44 in.
Belt weight				9.9 kg/m ²	2.03 lbs/ft ²
Coefficient of friction	tooth side to steel		dynamic	0,5	
Operating temperature	continuous		from / to	-10 / 80 °C	14 / 176 °F
Minimum pulley diameter	A) without counter flexing	number of teeth, t1		18	
		d1		124.54 mm	4.9 in.
		d2		120 mm	4.72 in.
	B) with counter flexing	number of teeth, t1		20	
		d1		138.69 mm	5.46 in.
		d2		150 mm	5.91 in.
Belt width	maximum			152.4 mm	6 in.
Endless length	minimum			1200 mm	47.24 in.
Manufacturing length	standard			100000 mm	328.08 ft.

Reference images


Side view

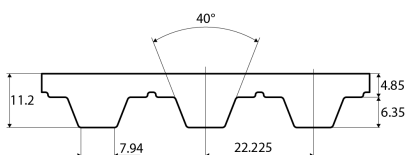

A) without counter flexing



B) with counter flexing



Fabrication

This information on the fabrication options is general, please contact Ammeraal Beltech for the specific fabrication possibilities of the timing belt of your choice.

Open end, prepared splice, spliced endless with mechanical fastener or a pin joint fastener.

Cleats welded or mechanically attached, metal teeth, guides welded or glued.

Covers can be welded, glued, coated or vulkanized onto the back side of the timing belt.

Thermoplastic covers can be embossed. Perforations, lateral and longitudinal slots, lateral and longitudinal profiles.

Additional Information

Tooth profile according to standard: metric ISO 17396 , imperial ISO 5296-1, curvilinear ISO 13050, depending on the belt type.

This sheet contains typical values, which apply to a temperature of approx. 20 °C (68 °F), unless otherwise stated, individual data may differ.

Consult our specialists for further information like technical calculations. Instructions regarding joining, storage & maintenance and tracking & tensioning.

Standard belt width [mm]	Allow. tensile load Linear open end & Torque [N]	Allow. tensile load Linear welded endless [N]	Spring force [N]
25.4	2800	1400	792000
50.8	5600	2800	1584000
76.2	8400	4200	2376000
101.61	11200	5600	3168000

Speed rpm [1/min]	Specific tooth force [N/mm]	Specific power [W/mm]
0	9.6	0
25	9.266	0.086
50	8.953	0.166
75	8.67	0.241
100	8.383	0.311
150	7.926	0.44
200	7.48	0.554
300	6.942	0.771
400	6.553	0.971
500	6.248	1.157
750	5.691	1.581
1000	5.288	1.959
1250	4.977	2.304
1500	4.719	2.622
1750	4.502	2.918
2000	4.314	3.196
3000	3.74	4.156
4000	3.331	4.935

Standard