

# PU Linear T10 Aramid

Article code: TBPU000032

## General information

<b>Productgroup</b>	Timing belts, PU Linear
<b>Industry segment</b>	General industry; Container & packaging; Wood: Panel board
<b>Main product feature</b>	Positive drive, Wear resistant

## Belt construction

<b>Tension member</b>		aramid
<b>Material</b>	<b>body</b>	Polyurethane
<b>Surface</b>	<b>tooth side</b>	Polyurethane
	<b>back side</b>	Polyurethane

## Characteristics


<b>Food Grade (FG)</b>	no
<b>Antistatic (AS)</b>	no
<b>Oil &amp; Fat resistance</b>	yes

## Technical data

<b>Tooth</b>	profile		T10	
	pitch		10 mm	0.39 in.
<b>Hardness body material</b>	ISO 868		92A Shore	
<b>Belt thickness</b>	total		4.5 mm	0.18 in.
<b>Belt weight</b>			4 kg/m <sup>2</sup>	0.82 lbs/ft <sup>2</sup>
<b>Coefficient of friction</b>	tooth side to steel	dynamic	0,5	
<b>Operating temperature</b>	continuous	from / to	-10 / 80 °C	14 / 176 °F
<b>Minimum pulley diameter</b>	A) without counter flexing	number of teeth, t1	12	
		d1	36.35 mm	1.43 in.
		d2	50 mm	1.97 in.
	B) with counter flexing	number of teeth, t1	20	
		d1	61.81 mm	2.43 in.
		d2	50 mm	1.97 in.
<b>Belt width</b>	maximum		150 mm	5.91 in.
<b>Endless length</b>	minimum		500 mm	19.69 in.
<b>Manufacturing length</b>	standard		100000 mm	328.08 ft.

## Reference images


### Side view

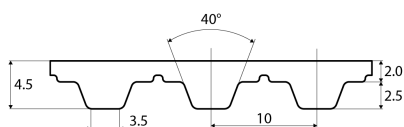

### A) without counter flexing



### B) with counter flexing



## Fabrication

This information on the fabrication options is general, please contact Ammeraal Beltech for the specific fabrication possibilities of the timing belt of your choice.

Open end, prepared splice, spliced endless with mechanical fastener or a pin joint fastener.

Cleats welded or mechanically attached, metal teeth, guides welded or glued.

Covers can be welded, glued, coated or vulkanized onto the back side of the timing belt.

Thermoplastic covers can be embossed. Perforations, lateral and longitudinal slots, lateral and longitudinal profiles.

## Additional Information

Tooth profile according to standard: metric ISO 17396 , imperial ISO 5296-1, curvilinear ISO 13050, depending on the belt type.

This sheet contains typical values, which apply to a temperature of approx. 20 °C (68 °F), unless otherwise stated, individual data may differ.

Consult our specialists for further information like technical calculations. Instructions regarding joining, storage & maintenance and tracking & tensioning.

Standard belt width [mm]	Allow. tensile load Linear open end & Torque [N]	Allow. tensile load Linear welded endless [N]		Spring force [N]
10	700	350		145000
16	1000	500		235000
25	1750	875		392000
32	2350	1175		507000
50	3970	1985		861000
75	4900	2450		1332000
100.1	6700	3350		1776000

Speed rpm [1/min]	Specific tooth force [N/mm]	Specific power [W/mm]	
0	5.18	0	
25	5	0.021	
50	4.855	0.04	
75	4.7	0.059	
100	4.611	0.077	
150	4.443	0.111	
200	4.275	0.143	
300	4.028	0.201	
400	3.836	0.256	
500	3.68	0.307	
750	3.43	0.429	
1000	3.163	0.527	
1250	2.992	0.623	
1500	2.844	0.711	
1750	2.724	0.795	
2000	2.612	0.871	
3000	2.278	1.139	
4000	2.039	1.359	

Standard