

# Soliflex PRO mini TPU/20 white FG Mono

Article code: SFPU000746

## General information

<b>Product group</b>	Soliflex
<b>Main product feature</b>	Positive drive, Chemical resistant, Non-stick, Wear resistant

## Belt construction

<b>Material</b>	TPU
<b>Top side finish</b>	smooth
<b>Bottom side finish</b>	smooth
<b>Color</b>	white

## Characteristics

<b>Food Grade (FG)</b>	yes	According to: EU 1935/2004, EU 10/2011; FDA; USDA
------------------------	-----	---

## Technical data

<b>Pitch</b>			25.5 mm	1 in.
<b>Hardness</b>	according to ISO 868		53D Shore	
<b>Belt thickness</b>			2 mm	0.08 in.
<b>Weight</b>			2.4 kg/m <sup>2</sup>	0.49 lbs/ft <sup>2</sup>
<b>Force at 1% elongation</b>	according to ISO 21181		2 N/mm	11.42 lbs/in.
<b>Operating temperature</b>	continuous	from/to	-5 / 70 °C	23 / 158 °F
<b>Minimum pulley diameter</b>	flexing		63.3 mm	2.49 in.
	backflexing		79.6 mm	3.13 in.
<b>Belt width</b>	maximum		1200 mm	47.24 in.


## Fabrication

<b>Recommended splice method</b>	Butt weld
----------------------------------	-----------

## Additional information

This sheet contains typical values, which apply to a temperature of approx. 20 °C (68 °F), unless otherwise stated, individual data may differ. Keep the belt tension to a practical working minimum for maximum belt and machine life. Store loose and wrapped in plastic. The allowable product temperature may vary.

## Soliflex layout

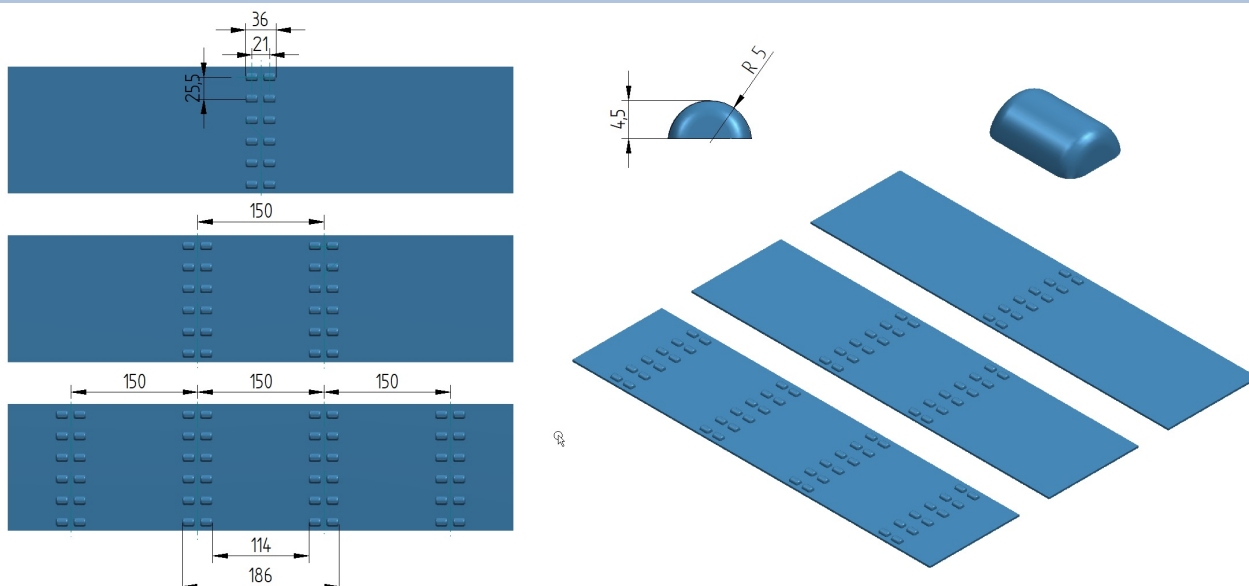

Because of continuous development, the presented data is subject to alteration. This data replaces that included in previous publications. Ammeraal Beltech excludes any liability for the incorrect use of the above stated information. Subject to the general terms and conditions of sale and delivery, as applied by its operating companies, are all activities performed and services rendered by Ammeraal Beltech.