

# PU Linear XL Steel NB

Article code: TBPU000101

## General information

<b>Productgroup</b>	Timing belts, PU Linear
<b>Industry segment</b>	General industry; Container & packaging; Paper & print
<b>Main product feature</b>	Low friction back side, Positive drive, Wear resistant

## Belt construction

<b>Tension member</b>		steel
<b>Material</b>	<b>body</b>	Polyurethane
<b>Surface</b>	<b>tooth side</b>	Polyurethane
	<b>back side</b>	Polyamide fabric

## Characteristics


<b>Food Grade (FG)</b>	no
<b>Antistatic (AS)</b>	no
<b>Oil &amp; Fat resistance</b>	yes

## Technical data

<b>Tooth</b>	profile		XL	
	pitch		5.08 mm	0.2 in.
<b>Hardness body material</b>	ISO 868		92A Shore	
<b>Belt thickness</b>	total		2.3 mm	0.09 in.
<b>Belt weight</b>			2.4 kg/m <sup>2</sup>	0.49 lbs/ft <sup>2</sup>
<b>Coefficient of friction</b>	tooth side to steel	dynamic	0,5	
<b>Operating temperature</b>	continuous	from / to	-10 / 80 °C	14 / 176 °F
<b>Minimum pulley diameter</b>	A) without counter flexing	number of teeth, t1	10	
		d1	15.66 mm	0.62 in.
		d2	30 mm	1.18 in.
	B) with counter flexing	number of teeth, t1	15	
		d1	23.75 mm	0.94 in.
		d2	30 mm	1.18 in.
<b>Belt width</b>	maximum		101.6 mm	4 in.
<b>Endless length</b>	minimum		500 mm	19.69 in.
<b>Manufacturing length</b>	standard		100000 mm	328.08 ft.

## Reference images


### Side view

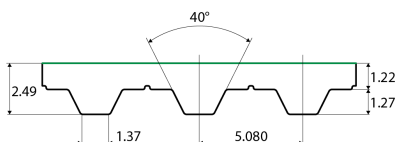

### A) without counter flexing



### B) with counter flexing



## Fabrication

This information on the fabrication options is general, please contact Ammeraal Beltech for the specific fabrication possibilities of the timing belt of your choice.

Open end, prepared splice, spliced endless with mechanical fastener or a pin joint fastener.

Cleats welded or mechanically attached, metal teeth, guides welded or glued.

Covers can be welded, glued, coated or vulkanized onto the back side of the timing belt.

Thermoplastic covers can be embossed. Perforations, lateral and longitudinal slots, lateral and longitudinal profiles.

## Additional Information

Tooth profile according to standard: metric ISO 17396 , imperial ISO 5296-1, curvilinear ISO 13050, depending on the belt type.

This sheet contains typical values, which apply to a temperature of approx. 20 °C (68 °F), unless otherwise stated, individual data may differ.

Consult our specialists for further information like technical calculations. Instructions regarding joining, storage & maintenance and tracking & tensioning.

Standard belt width [mm]	Allow. tensile load Linear open end & Torque [N]	Allow. tensile load Linear welded endless [N]	Spring force [N]
6.35	180	90	45000
7.94	210	105	52500
9.53	270	135	67500
12.7	360	180	90000
19.1	570	285	142500
25.4	750	375	187500
38.1	1140	570	285000
50.81	1500	750	375000

Speed rpm [1/min]	Specific tooth force [N/mm]	Specific power [W/mm]
0	2.51	0
25	2.42	0.005
50	2.366	0.01
75	2.321	0.015
100	2.263	0.019
150	2.193	0.028
200	2.124	0.036
300	2.022	0.051
400	1.942	0.066
500	1.877	0.079
750	1.753	0.111
1000	1.665	0.141
1250	1.587	0.168
1500	1.526	0.194
1750	1.474	0.218
2000	1.428	0.242
3000	1.288	0.327
4000	1.187	0.402

Standard