Technical datasheet

Soliflex Sideskirt TPU/20 Capri blue FG MD

Article code: SFPU000675





General information						
Product group	Soliflex					
Main product feature	Chemical resistant, Non-stick, Metal detectable					
Belt construction						
Material	TPU					
Top side	smooth					
Bottom side	smooth					
Color	Capri blue					
Characteristics						
Food Grade (FG)	yes EU 1935/2004, EU 10/2011; FDA; USDA					
Technical data						
				~		
Hardness	ISO 868			Shore		
Force at 1% elongation	ISO 21181		0.35	N/mm	2	lbs/in.
Belt thickness			2	mm	0.08	in.
Weight			2.2	kg/m²	0.45	lbs/ft²
Operating temperature	continuous	from / to	-20 / 60	°C	-4 / 140	°F
Minimum pulley diameter	flexing		20	mm	0.79	in.
	backflexing		20	mm	0.79	in.
Manufacturing width	maximum		750	mm	29.53	in.
Fabrication						
Recommended splice method	Butt weld					

Additional information

This sheet contains typical values, which apply to a temperature of approx. 20 °C (68 °F), unless otherwise stated, individual data may differ. Keep the belt tension to a practical working minimum for maximum belt and machine life.

Store loose and wrapped in plastic. The allowable product temperature may vary.

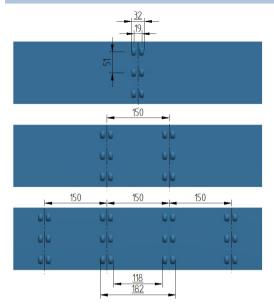

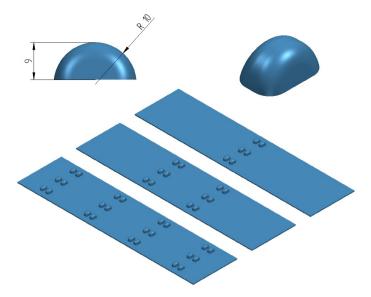

Because of continuous development, the presented data is subject to alteration. This data replaces that included in previous publications. Ammeraal Beltech excludes any liability for the incorrect use of the above stated information. Subject to the general terms and conditions of sale and delivery, as applied by its operating companies, are all activities performed and services rendered by Ammeraal Beltech.