

# RAPPLON® FLAT BELTS

Sales program 2016

# RAPPLON® QuickSplice Flat Belts

- Process belts
- Drive Belts, Tangential Drive Belts and Spindle tapes

## Technical data RAPPLON® belts

Belt type	Art. No.	Belt Thickness (mm)	Belt Weight (kg/m <sup>2</sup> )	Min. pulley diameter mm (20°C)	Belt factor at 1% elongation (N/mm)	Antistatic (AS)	Recommended elongation from/to (%)	Thermal application range (°C)	Cover running side (Material, color, surface structure)	Cover back side (Material, color, surface structure)	Tension member (Material)	Standard Range Central Stock
<b>Process Belts</b>												
GG E03.14 FFQ	54583	1.40	1.45	20	3.1	YES	0.5 - 2.0	+0 / +60	XNBR elastomer, Grey, Fine	XNBR elastomer, Grey, Fine	Polyester fabric	√
GG E05.14 FFQ	54607	1.40	1.50	25	5.0	YES	0.5 - 2.0	+0 / +60	XNBR elastomer, Black, Fine	XNBR elastomer, Green, Fine	Polyester fabric	√
GG E10.30 RRQ FG	54652	3.00	3.10	30	10.0	YES	0.4 - 0.6	+0 / +60	XNBR elastomer, Grey, Rough	XNBR elastomer, Grey, Rough	Polyester fabric	√
GG E10.40 RRQ FG	54653	4.00	4.20	40	10.0	YES	0.4 - 0.6	+0 / +60	XNBR elastomer, Grey, Rough	XNBR elastomer, Grey, Rough	Polyester fabric	√
GG E10.55 RRQ FG	54658	5.50	6.10	60	10.0	YES	0.4 - 0.6	+0 / +60	XNBR elastomer, Grey, Rough	XNBR elastomer, Grey, Rough	Polyester fabric	√
GG P01.14 FFQ	54582	1.40	1.40	15	1.0	YES	0.5 - 2.0	+0 / +60	XNBR elastomer, Black, Rough	XNBR elastomer, Green, Fine	Polyamide fabric	√
PG E05.12 SFQ	54630	1.20	1.20	20	5.0	YES	0.5 - 2.0	+0 / +60	Thermoplastic elastomer, Black, Smooth	XNBR elastomer, Green, Fine	Polyester fabric	√
TG E04.12 RQ	54624	1.25	1.25	15	4.0	YES	0.5 - 2.0	+0 / +60	Polyester fabric, Green, Fabric texture	XNBR elastomer, Green, Rough	Polyester fabric	√
TT E05.11 Q	54599	1.10	1.10	25	5.0	YES	0.5 - 2.0	+0 / +60	Polyester fabric, Black, Fabric texture	Polyester fabric, Grey, Fabric texture	Polyester fabric	√
TT E09.18 Q	54598	1.90	1.90	25	9.0	YES	0.5 - 2.1	+0 / +60	Mixed fabric, Grey, Fabric texture	Mixed fabric, Grey, Fabric texture	Polyester fabric	√
TT P02.12 Q	54647	1.20	1.00	10	2.0	YES	1.0 - 2.0	+0 / +60	Polyamide fabric, Black, Fabric texture	Polyamide fabric, Blue, Fabric texture	Polyamide fabric	√
TU E04.09 RQ	54603	0.90	1.05	15	4.0	YES	0.5 - 2.0	+0 / +60	Polyester fabric, Green, Rough	Polyurethane, Black, Fabric texture	Polyester fabric	√
UV E06.20 FQ	54559	2.00	2.10	20	6.0	YES	0.5 - 1.5	+0 / +60	Polyurethane, Royal blue, Fine	Fleece, Grey, Ground quality	Polyester fabric	√
<b>Drive Belts, Tangential Drive Belts and Spindle Tape</b>												
GG E08.20 RRQ	54614	2.00	2.00	25	8.0	YES	0.5 - 1.5	+0 / +60	XNBR elastomer, Black, Rough	XNBR elastomer, Blue, Rough	Polyester fabric	√
GG E15.20 RFQ	54655	2.00	2.10	25	15.0	YES	0.5 - 1.5	+0 / +60	XNBR elastomer, Grey, Rough	XNBR elastomer, Blue, Fine	Polyester fabric	√
GG E15.25 RFQ	54656	2.50	2.60	30	15.0	YES	0.5 - 1.5	+0 / +60	XNBR elastomer, Grey, Rough	XNBR elastomer, Blue, Fine	Polyester fabric	√
GG E15.30 RFQ	54657	3.00	3.30	40	15.0	YES	0.5 - 1.5	+0 / +60	XNBR elastomer, Grey, Rough	XNBR elastomer, Blue, Fine	Polyester fabric	√
GG E22.25 RFQ	54665	2.50	2.60	40	22.0	YES	0.5 - 1.5	+0 / +60	XNBR elastomer, Black, Rough	XNBR elastomer, Blue, Fine	Polyester fabric	√
GG E22.30 RFQ	54666	3.00	3.10	60	22.0	YES	0.5 - 1.5	+0 / +60	XNBR elastomer, Black, Rough	XNBR elastomer, Blue, Fine	Polyester fabric	√
GG E35.30 RRQ	54627	3.00	3.30	60	35.0	YES	0.5 - 1.5	+0 / +60	XNBR elastomer, Black, Rough	XNBR elastomer, Blue, Rough	Polyester fabric	√
UT E04.07 SQ	54970	0.70	0.70	10	4.0	YES	0.5 - 2.0	+0 / +60	Polyurethane, Black, Smooth	Mixed fabric, Blue, Fabric texture	Mixed fabric	√
UU E15.20 RFQ FG	54561	2.10	2.20	30	15.0	YES	0.5 - 1.5	+0 / +60	Polyurethane, Royal blue, Rough	Polyurethane, Royal blue, Rough	Polyester fabric	√
UU E15.30 RFQ FG	54542	3.00	3.50	30	15.0	YES	0.5 - 1.5	+0 / +60	Polyurethane, Royal blue, Rough	Polyurethane, Royal blue, Rough	Polyester fabric	√
UU E22.20 RRQ FG	54555	2.00	2.20	30	22.0	YES	0.5 - 1.5	+0 / +60	Polyurethane, Royal blue, Rough	Polyurethane, Royal blue, Rough	Polyester fabric	√
UU E22.30 RRQ FG	54556	3.00	3.50	40	22.0	YES	0.5 - 1.5	+0 / +60	Polyurethane, Royal blue, Rough	Polyurethane, Royal blue, Rough	Polyester fabric	√

# RAPPLON® QuickSplice Flat Belts

- Elastic Process Belts

Technical data RAPPLON® belts													
Belt type	Art. No.	Belt Thickness (mm)		Belt Weight (kg/m <sup>2</sup> )	Min. pulley diameter mm (20°C)	Belt factor at 6% elongation (N/mm)	Antistatic (AS)	Recommended elongation from/to (%)	Thermal application range (°C)	Cover running side (Material, color, surface structure)	Cover back side (Material, color, surface structure)	Tension member (Material)	Standard Range Central Stock
<b>Elastic Process Belts</b>													
GG N08 RRQ	54262	1.50	1.40	1.40	15	0.8	YES	2.0 - 6.0	+0 / +60	XNBR elastomer, Black, Rough	XNBR elastomer, Green, Rough	Thermoplastic elastomer	√
GG N15 FFQ	54585	1.40	1.40	1.40	15	1.5	YES	2.0 - 6.0	+0 / +60	XNBR elastomer, Black, Fine	XNBR elastomer, Black, Fine	Thermoplastic elastomer	√
GG N22 RFQ	54263	1.50	1.40	1.40	15	2.2	YES	2.0 - 6.0	+0 / +60	XNBR elastomer, Black, Rough	XNBR elastomer, Green, Fine	Thermoplastic elastomer	√
GG N27 RFQ	54608	1.70	1.65	1.65	15	2.7	YES	2.0 - 6.0	+0 / +60	XNBR elastomer, Black, Rough	XNBR elastomer, Blue, Fine	Thermoplastic elastomer	√
GV N20.17 RQ	54547	1.70	1.50	1.50	15	2.0	YES	0.5 - 2.0	+0 / +60	XNBR elastomer, Black, Rough	Fleece, Grey, Ground quality	Thermoplastic elastomer	√
TU N20 FQ	54587	1.25	1.30	1.30	20	2.0	NO	2.0 - 6.0	+0 / +60	Polyamide fabric, Green, Fabric texture	Polyurethane, Royal blue, Fine	Polyurethane	√
UU N06 RFQ FG	54532	0.80	0.90	0.90	6	0.6	YES	2.0 - 6.0	+0 / +60	Polyurethane, Black, Rough	Polyurethane, Royal blue, Fine	Polyurethane	√
UU N08 RP5Q	54453	1.80	1.90	1.90	20	0.8	NO	2.0 - 6.0	+0 / +60	Polyurethane, Royal blue, Rough	Polyurethane, Royal blue, P5 structure	Polyurethane	
UU N08 RSQ FG blue	54563	0.80	0.90	0.90	6	0.8	NO	2.0 - 6.0	+0 / +60	Polyurethane, Royal blue, Rough	Polyurethane, Royal blue, Smooth	Polyurethane	√
UU N08 RSQ FG white	54543	0.80	1.00	1.00	6	0.8	NO	2.0 - 6.0	+0 / +60	Polyurethane, White, Rough	Polyurethane, White, Smooth	Polyurethane	
UU N12 RFQ FG	54533	1.15	1.35	1.35	15	1.2	YES	2.0 - 6.0	+0 / +60	Polyurethane, Black, Rough	Polyurethane, Royal blue, Fine	Polyurethane	√
UU N16 RP5Q	54451	1.80	1.90	1.90	20	1.6	YES	2.0 - 6.0	+0 / +60	Polyurethane, Royal blue, Rough	Polyurethane, Royal blue, P5 structure	Polyurethane	
UU N16 RSQ FG blue	54540	1.10	1.30	1.30	20	1.6	YES	2.0 - 6.0	+0 / +60	Polyurethane, Black, Rough	Polyurethane, Royal blue, Smooth	Polyurethane	√
UU N16 SP5Q FG	54562	1.10	1.30	1.30	20	1.6	YES	2.0 - 6.0	+0 / +60	Polyurethane, Black, Smooth	Polyurethane, Royal blue, P5 structure	Polyurethane	√
UU N16 SSQ FG	54551	1.10	1.30	1.30	20	1.6	YES	2.0 - 6.0	+0 / +60	Polyurethane, Black, Smooth	Polyurethane, Royal blue, Smooth	Polyurethane	√
UU N17 RFQ FG	54534	1.50	1.80	1.80	20	1.7	YES	2.0 - 6.0	+0 / +60	Polyurethane, Black, Rough	Polyurethane, Royal blue, Fine	Polyurethane	√
UU N22 RFQ FG	54535	1.85	2.25	2.25	25	2.2	YES	2.0 - 6.0	+0 / +60	Polyurethane, Black, Rough	Polyurethane, Royal blue, Fine	Polyurethane	√
UV N12 FQ	54557	1.50	1.70	1.70	20	1.2	YES	0.5 - 1.5	+0 / +60	Polyurethane, Royal blue, Fine	Fleece, Grey, Ground quality	Polyurethane	√




Fabric structure P5

# RAPPLON® Classic Flat Belts

- Process Belts

Technical data RAPPLON® belts													
Belt type	Art. No.	Belt Thickness (mm)	Belt Weight (kg/m <sup>2</sup> )	Min. pulley diameter mm (20°C)	Belt factor at 1% elongation (N/mm)	Antistatic (AS)	Recommended elongation from/to (%)	Thermal application range (°C)	Cover running side (Material, color, surface structure)	Cover back side (Material, color, surface structure)	Tension member (Material)	Standard Range	Central Stock
<b>Process Belts</b>													
GG S02.11 FFC	54735	1.10	1.20	10	2.0	YES	2.0 - 3.0	+0 / +80	NBR elastomer, Grey, Fine	NBR elastomer, Grey, Fine	Polyamide foil	✓	
GG S02.11 RRC	54730	1.10	1.20	10	2.0	YES	2.0 - 3.0	+0 / +80	NBR elastomer, Grey, Rough	NBR elastomer, Grey, Rough	Polyamide foil	✓	
GG S04.14 RRC	54731	1.40	1.50	20	4.0	YES	2.0 - 3.0	+0 / +80	NBR elastomer, Grey, Rough	NBR elastomer, Grey, Rough	Polyamide foil	✓	
GG S04.30 RRC FG	54783	3.00	3.10	25	4.0	YES	2.0 - 3.0	+0 / +80	XNBR elastomer, Grey, Rough	XNBR elastomer, Grey, Rough	Polyamide foil		
GG S04.40 RRC FG	54784	4.00	3.10	30	4.0	YES	2.0 - 3.0	+0 / +80	XNBR elastomer, Grey, Rough	XNBR elastomer, Grey, Rough	Polyamide foil		
GG S06.30 RRC FG	54780	3.00	3.30	30	6.0	YES	2.0 - 3.0	+0 / +80	XNBR elastomer, Grey, Rough	XNBR elastomer, Grey, Rough	Polyamide foil	✓	
GG S06.30 RRC	54274	3.00	3.30	30	6.0	YES	2.0 - 3.0	+0 / +80	XNBR elastomer, Green, Rough	XNBR elastomer, Green, Rough	Polyamide foil		
GG S06.40 RRC FG	54781	4.00	4.40	40	6.0	YES	2.0 - 3.0	+0 / +80	XNBR elastomer, Grey, Rough	XNBR elastomer, Grey, Rough	Polyamide foil	✓	
GG S06.40 RRC	54145	4.00	4.40	40	6.0	YES	2.0 - 3.0	+0 / +80	XNBR elastomer, Green, Rough	XNBR elastomer, Green, Rough	Polyamide foil		
GG S06.50 RRC	54275	5.00	5.50	50	6.0	YES	2.0 - 3.0	+0 / +80	XNBR elastomer, Green, Rough	XNBR elastomer, Green, Rough	Polyamide foil		
GG S06.55 RRC FG	54782	5.50	6.00	60	6.0	YES	2.0 - 3.0	+0 / +80	XNBR elastomer, Grey, Rough	XNBR elastomer, Grey, Rough	Polyamide foil	✓	
GG S06.60 RRC	54276	6.00	6.80	60	6.0	YES	2.0 - 3.0	+0 / +80	XNBR elastomer, Green, Rough	XNBR elastomer, Green, Rough	Polyamide foil		
GG S06.70 RP6C	54790	7.00	6.50	90	6.0	YES	2.0 - 3.0	+0 / +80	XNBR elastomer, Grey, Rough	NBR elastomer, Light blue, P6 Super grip	Polyamide foil	✓	
GG S07.30 RRC	54243	3.00	3.40	40	7.0	YES	2.0 - 3.0	+0 / +80	TNBR elastomer, Blue, Rough	TNBR elastomer, Blue, Rough	Polyamide foil	✓	
GG S09.30 RRC	54736	3.00	3.50	60	9.0	YES	2.0 - 3.0	+0 / +80	TNBR elastomer, Blue, Rough	TNBR elastomer, Blue, Rough	Polyamide foil	✓	
GG S11.50 RRC	54278	5.00	5.70	60	11.0	YES	2.0 - 3.0	+0 / +80	TNBR elastomer, Blue, Rough	TNBR elastomer, Blue, Rough	Polyamide foil	✓	
PP S02.12 SSC	54760	1.20	1.30	30	2.0	YES	2.0 - 3.0	+0 / +80	Polyamide foil, Black, Smooth	Polyamide foil, Black, Smooth	Polyamide foil		
PP S04.14 SSC	54761	1.40	1.60	50	4.0	YES	2.0 - 3.0	+0 / +80	Polyamide foil, Black, Smooth	Polyamide foil, Black, Smooth	Polyamide foil		
S09 C	54504	0.90	1.00	60	9.0	NO	2.0 - 3.0	+0 / +80	Polyamide foil, Transparent, Smooth	Polyamide foil, Transparent, Smooth	Polyamide foil	✓	
S27 C	58181	2.70	3.40	80	27.0	NO	2.0 - 3.0	+0 / +80	Polyamide foil, Transparent, Smooth	Polyamide foil, Transparent, Smooth	Polyamide foil		
TT S02.10 C	54750	1.00	0.85	10	2.0	YES	2.0 - 3.0	+0 / +80	Polyamide fabric, Blue, Fabric texture	Polyamide fabric, Blue, Fabric texture	Polyamide foil	✓	
TT S04.12 C	54751	1.20	1.15	20	4.0	NO	2.0 - 3.0	+0 / +80	Polyamide fabric, Blue, Fabric texture	Polyamide fabric, Blue, Fabric texture	Polyamide foil	✓	
TT S04.12 C black	54251	1.20	1.10	20	4.0	YES	2.0 - 3.0	+0 / +80	Polyamide fabric, Black, Fabric texture	Polyamide fabric, Black, Fabric texture	Polyamide foil	✓	
TT S09.16 C	54250	1.65	1.65	60	9.0	YES	2.0 - 3.0	+0 / +80	Polyamide fabric, Black, Fabric texture	Polyamide fabric, Black, Fabric texture	Polyamide foil	✓	
TT S15.23 C	54249	2.30	2.50	90	15.0	YES	2.0 - 3.0	+0 / +80	Polyamide fabric, Black, Fabric texture	Polyamide fabric, Black, Fabric texture	Polyamide foil		



Fabric structure P6 Superrip

# RAPPLON® Classic Flat Belts

- Process Belts

## Technical data RAPPLON® belts

Belt type	Art. No.	Belt Thickness (mm)	Belt Weight (kg/m <sup>2</sup> )	Min. pulley diameter mm (20°C)	Belt factor at 1% elongation (N/mm)	Antistatic (AS)	Recommended elongation from/to (%)	Thermal application range (°C)	Cover running side (Material, color, surface structure)	Cover back side (Material, color, surface structure)	Tension member (Material)	Standard Range Central Stock
<b>Process Belts</b>												
GT S04.25 RC	54705	2.40	3.90	40	4.0	YES	2.0 - 3.0	+0 / +80	XNBR elastomer, Green, Rough	Polyamide fabric, Steel blue, Fabric texture	Polyamide foil	
TG E12.50 FC	56421	5.00	5.00	80	11.0	YES	0.2 - 0.6	+0 / +80	Polyester fabric, Black, Fabric texture	Natural rubber, Red, Fine	Polyester fabric	✓
TG E12.65 FC	56420	6.50	6.80	80	11.0	YES	0.2 - 0.6	+0 / +80	Polyester fabric, Black, Fabric texture	Natural rubber, Red, Fine	Polyester fabric	✓
TG E18.20 P5C	57239	1.90	1.80	60	18.0	YES	0.2 - 0.6	+0 / +80	Polyester fabric, Transparent, Fabric texture	NBR elastomer, Green, P5 structure	Polyester fabric	✓
TG P03.12 FC	54525	1.25	1.20	25	3.0	YES	0.2 - 0.6	+0 / +80	Polyamide fabric, Black, Fabric texture	XNBR elastomer, Green, Fine	Polyamide fabric	✓
TG P04.20 RC	54265	2.00	2.00	25	3.8	YES	0.2 - 0.6	+0 / +80	Polyamide fabric, Black, Fabric texture	NBR elastomer, Green, Rough	Polyamide fabric	✓
TG P07.29 RC	54266	2.90	3.00	50	7.0	YES	0.2 - 0.6	+0 / +80	Polyamide fabric, Black, Fabric texture	NBR elastomer, Green, Rough	Polyamide fabric	
TG P07.60 RC	54268	6.00	6.50	100	7.0	YES	0.2 - 0.6	+0 / +80	Polyamide fabric, Black, Fabric texture	NBR elastomer, Green, Rough	Polyamide fabric	
TG S04.12 RC	54269	1.25	1.25	20	4.0	YES	2.0 - 3.0	+0 / +80	Polyamide fabric, Green, Fabric texture	NBR elastomer, Green, Rough	Polyamide foil	✓
TG S04.14 RC	54261	1.40	1.40	20	4.0	YES	2.0 - 3.0	+0 / +80	Polyamide fabric, Green, Fabric texture	XNBR elastomer, Green, Rough	Polyamide foil	✓
TG S06.30 RC	54716	3.00	3.10	50	6.0	YES	2.0 - 3.0	+0 / +80	Polyamide fabric, Blue, Fabric texture	TNBR elastomer, Grey, Rough	Polyamide foil	✓
TG S09.40 RC	54717	4.00	4.20	60	9.0	YES	2.0 - 3.0	+0 / +80	Polyamide fabric, Blue, Fabric texture	TNBR elastomer, Grey, Rough	Polyamide foil	
TG S09.60 RC	54718	6.10	6.80	80	9.0	YES	2.0 - 3.0	+0 / +80	Polyamide fabric, Blue, Fabric texture	TNBR elastomer, Grey, Rough	Polyamide foil	✓



Fabric structure P5

## RAPPLON® Tools

### Cutting and finger punching equipment



RC 60 Cutter



HFT 120



MFT 60 / MFT 130 / MFT 250



BC-350

### Heating pliers



QSP 60 plus



QSP 60LF plus



QSP 105 plus



QSP 160 plus

# RAPPLON® Classic Flat Belts

- Drive belts with elastomer cover
- Drive Belts and Tangential Drive Belts
- Spindle tapes

## Technical data RAPPLON® belts

Belt type	Art. No.	Belt Thickness (mm)	Belt Weight (kg/m <sup>2</sup> )	Min. pulley diameter mm (20°C)	Belt factor at 1% elongation (N/mm)	Antistatic (AS)	Recommended elongation from/to (%)	Thermal application range (°C)	Cover running side (Material, color, surface structure)	Cover back side (Material, color, surface structure)	Tension member (Material)	Standard Range Central Stock
<b>Drive Belts with elastomer cover</b>												
GT S02 RC	54701	1.10	1.00	10	2.0	YES	2.0 - 3.0	+0 / +80	TNBR elastomer, Grey, Rough	Polyamide fabric, Blue, Fabric texture	Polyamide foil	√
GT S04 RC	54702	1.30	1.30	20	4.0	YES	2.0 - 3.0	+0 / +80	TNBR elastomer, Grey, Rough	Polyamide fabric, Blue, Fabric texture	Polyamide foil	√
GT S06 RC	54703	1.40	1.50	40	6.0	YES	2.0 - 3.0	+0 / +80	TNBR elastomer, Grey, Rough	Polyamide fabric, Blue, Fabric texture	Polyamide foil	√
GT S09 FC	54704	1.90	2.10	40	9.0	YES	2.0 - 3.0	+0 / +80	TNBR elastomer, Blue, Fine	Polyamide fabric, Blue, Fabric texture	Polyamide foil	√
<b>Drive belts and Tangential Drive Belts</b>												
GG S04.17 RFC	54738	1.70	1.90	20	4.0	YES	2.0 - 3.0	+0 / +80	TNBR elastomer, Grey, Rough	TNBR elastomer, Blue, Fine	Polyamide foil	√
GG S06.18 RFC	54734	1.80	1.90	40	6.0	YES	2.0 - 3.0	+0 / +80	TNBR elastomer, Grey, Rough	TNBR elastomer, Blue, Fine	Polyamide foil	√
GG S09.22 RFC	54733	2.20	2.50	60	9.0	YES	2.0 - 3.0	+0 / +80	TNBR elastomer, Grey, Rough	TNBR elastomer, Blue, Fine	Polyamide foil	√
GG S11.26 RFC	54530	2.60	3.00	60	11.0	YES	2.0 - 3.0	+0 / +80	TNBR elastomer, Grey, Rough	TNBR elastomer, Blue, Fine	Polyamide foil	√
GG S15.30 RRC	54748	3.00	3.50	80	15.0	YES	2.0 - 3.0	+0 / +80	TNBR elastomer, Grey, Rough	TNBR elastomer, Blue, Rough	Polyamide foil	√
GG S18.40 RRC	54749	4.00	4.70	160	18.0	YES	2.0 - 3.0	+0 / +80	TNBR elastomer, Grey, Rough	TNBR elastomer, Blue, Rough	Polyamide foil	√
<b>Spindle tapes</b>												
GT P02.05 SC	54980	0.55	0.55	10	1.55	YES	0.5 - 2.0	+0 / +80	NBR elastomer, Green, Smooth	Mixed fabric, Black, Fabric texture	Polyamide fabric	√
GT P02.09 SC	54981	0.90	0.75	15	2.0	YES	0.5 - 2.0	+0 / +80	NBR elastomer, Green, Smooth	Mixed fabric, Black, Fabric texture	Polyamide fabric	√

# RAPPLON® Classic Flat Belts

- Drive Belts with leather cover
- Drive Belts with grooved elastomer cover

## Technical data RAPPLON® belts

Belt type	Art. No.	Belt Thickness (mm)		Belt Weight (kg/m <sup>2</sup> )	Min. pulley diameter mm (20°C)	Belt factor at 1% elongation (N/mm)	Antistatic (AS)	Recommended elongation from/to (%)	Thermal application range (°C)	Cover running side (Material, color, surface structure)	Cover back side (Material, color, surface structure)	Tension member (Material)	Standard Range Central Stock
<b>Drive Belts with leather cover</b>													
LL S06 C	54038	3.80	3.70	70	6.0	YES	2.0 - 3.0	+0 / +80	Chrome leather, Grey, Ground quality	Chrome leather, Grey, Ground quality	Polyamide foil	√	
LL S09 C	54039	4.20	4.00	90	9.0	YES	2.0 - 3.0	+0 / +80	Chrome leather, Grey, Ground quality	Chrome leather, Grey, Ground quality	Polyamide foil	√	
LL S11 C	54040	4.50	4.60	120	11.0	YES	2.0 - 3.0	+0 / +80	Chrome leather, Grey, Ground quality	Chrome leather, Grey, Ground quality	Polyamide foil	√	
LL S18 C	54042	5.70	6.20	200	18.0	YES	2.0 - 3.0	+0 / +80	Chrome leather, Grey, Ground quality	Chrome leather, Grey, Ground quality	Polyamide foil	√	
LT S06 C	54045	2.60	2.50	50	6.0	YES	2.0 - 3.0	+0 / +80	Chrome leather, Grey, Ground quality	Polyamide fabric, Black, Fabric texture	Polyamide foil	√	
LT S09 C	54046	2.90	2.80	70	9.0	YES	2.0 - 3.0	+0 / +80	Chrome leather, Grey, Ground quality	Polyamide fabric, Black, Fabric texture	Polyamide foil	√	
LT S11 C	54047	3.00	3.00	100	11.0	YES	2.0 - 3.0	+0 / +80	Chrome leather, Grey, Ground quality	Polyamide fabric, Black, Fabric texture	Polyamide foil	√	
LT S15 C	54048	3.60	3.70	150	15.0	YES	2.0 - 3.0	+0 / +80	Chrome leather, Grey, Ground quality	Polyamide fabric, Black, Fabric texture	Polyamide foil	√	
LT S18 C	54049	3.90	4.40	200	18.0	YES	2.0 - 3.0	+0 / +80	Chrome leather, Grey, Ground quality	Polyamide fabric, Black, Fabric texture	Polyamide foil	√	
LT S27 C	54050	5.10	5.60	350	27.0	YES	2.0 - 3.0	+0 / +80	Chrome leather, Grey, Ground quality	Polyamide fabric, Black, Fabric texture	Polyamide foil	√	
LT S36 C	54051	5.90	6.60	400	36.0	YES	2.0 - 3.0	+0 / +80	Chrome leather, Grey, Ground quality	Polyamide fabric, Black, Fabric texture	Polyamide foil	√	
<b>Drive Belts with grooved elastomer cover</b>													
GG S11 LRC	54289	3.25	3.60	80	11.0	YES	2.0 - 3.0	+0 / +80	NBR elastomer, Black, Longitudinal grooves	NBR elastomer, Green, Rough	Polyamide foil	√	
GG S22 LRC	54297	4.60	4.90	220	22.0	YES	2.0 - 3.0	+0 / +80	NBR elastomer, Black, Longitudinal grooves	NBR elastomer, Green, Rough	Polyamide foil	√	
GG S33 LRC	54298	5.70	6.20	310	33.0	YES	2.0 - 3.0	+0 / +80	NBR elastomer, Black, Longitudinal grooves	NBR elastomer, Green, Rough	Polyamide foil	√	

# Local Contacts

## Australia

T +61 3 9555 7922  
info-au@ammeraalbeltech.com  
www.rydell.com.au

## Austria

T +43 171728 133  
info-de@ammeraalbeltech.com  
www.ammeraalbeltech.at

## Belgium

T +32 2 466 03 00  
info-be@ammeraalbeltech.com  
www.ammeraalbeltech.be

## Canada

T +1 905 890 1311  
info-ca@ammeraalbeltech.com  
www.ammeraalbeltech.com

## Chile

T +56 2 233 12900  
info-cl@ammeraalbeltech.com  
www.ammeraalbeltech.cl

## China

T +86 512 8287 2709  
info-cn@ammeraalbeltech.com  
www.ammeraalbeltech.com.cn

## Czech Republic

T +420 567 117 211  
info-cz@ammeraalbeltech.com  
www.ammeraalbeltech.cz

## Denmark

T + 45 7572 3100  
info-dk@ammeraalbeltech.com  
www.unichains.com

## Finland

T +358 207 911 400  
info-fi@ammeraalbeltech.com  
www.ammeraalbeltech.fi

## France

T +33 3 20 90 36 00  
info-fr@ammeraalbeltech.com  
www.ammeraalbeltech.fr

## Germany

T +49 4152 937-0  
info-de@ammeraalbeltech.com  
www.ammeraalbeltech.de

## Hungary

T +36 30 311 6099  
info-hu@ammeraalbeltech.com  
www.ammeraalbeltech.hu

## India

T +91 44 265 34 244  
info-in@ammeraalbeltech.com  
www.ammeraalbeltech.com

## Italy

T +39 051 660 60 06  
info-it@ammeraalbeltech.com  
www.ammeraalbeltech.it

## Luxembourg

T +352 26 48 38 56  
info-lu@ammeraalbeltech.com  
www.ammeraal-beltech.lu

## Malaysia

T +60 3 806 188 49  
info-my@ammeraalbeltech.com  
www.ammeraalbeltech.com

## Netherlands

T +31 72 57 51212  
info-nl@ammeraalbeltech.com  
www.ammeraalbeltech.nl

## Poland

T +48 32 44 77 179  
info-pl@ammeraalbeltech.com  
www.ammeraalbeltech.com

## Portugal

T +351 22 947 94 40  
info-pt@ammeraalbeltech.com  
www.ammeraalbeltech.pt

## Singapore

T +65 62739767  
info-sg@ammeraalbeltech.com  
www.ammeraalbeltech.com

## Slovakia

T +421 2 55648541-2  
info-sk@ammeraalbeltech.com  
www.ammeraalbeltech.sk

## South Korea

T +82 31 448 3613-7  
info-kr@ammeraalbeltech.com  
www.ammeraalbeltech.co.kr

## Spain

T +34 93 718 3054  
info-es@ammeraalbeltech.com  
www.ammeraalbeltech.es

## Sweden

T +46 44 780 3010  
info-se@ammeraalbeltech.com  
www.ammeraalbeltech.se

## Switzerland

T +41 55 2253 535  
info-ch@ammeraalbeltech.com  
www.ammeraalbeltech.ch

## Thailand

T +66 2 902 2604-13  
info-th@ammeraalbeltech.com  
www.ammeraalbeltech.com

## United Kingdom

T +44 1992 500550  
info-uk@ammeraalbeltech.com  
www.ammeraalbeltech.co.uk

## United States

T +1 847 673 6720  
info-us@ammeraalbeltech.com  
www.ammeraalbeltech.com

## Vietnam

T +84 8 376 562 05  
info-vn@ammeraalbeltech.com  
www.ammeraalbeltech.com.vn


## Global Headquarters:

**Ammeraal Beltech Holding B.V.**  
P.O. Box 38  
1700 AA Heerhugowaard  
The Netherlands

T +31 (0)72 575 1212  
F +31 (0)72 571 6455


info@ammeraalbeltech.com  
www.ammeraalbeltech.com

Expert advice, quality solutions  
and local service  
for all your belting needs

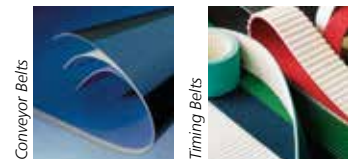


Conveyor Belts

Timing Belts

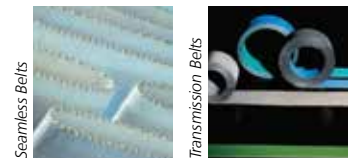

Seamless Belts

Transmission Belts

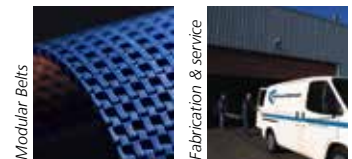

Modular Belts

Fabrication & service

... and 150 more service contact points at [www.ammeraalbeltech.com](http://www.ammeraalbeltech.com)