

PU Linear T5 Aramid L.Blue FG NC

Article code: TBPU000283

General information

Productgroup	Timing belts, PU Linear
Industry segment	Food: Meat & poultry, Fish & seafood; General industry
Main product feature	Slip-grip, Positive drive, Wear resistant

Belt construction

Tension member		aramid
Material	body	Polyurethane
Surface	tooth side	Polyurethane
	back side	Polyurethane

Characteristics


Food Grade (FG)	yes	EC 1935/2004, EU 10/2011; FDA
Antistatic (AS)	no	
Oil & Fat resistance	yes	

Technical data


Tooth	profile		T5	
	pitch		5 mm	0.2 in.
Hardness body material	ISO 868		85A Shore	
Belt thickness	total		2.3 mm	0.09 in.
Belt weight			2 kg/m ²	0.41 lbs/ft ²
Coefficient of friction	tooth side to steel	dynamic	0,5	
Operating temperature	continuous	from / to	-10 / 80 °C	14 / 176 °F
Minimum pulley diameter	A) without counter flexing	number of teeth, t1	10	
		d1	15.92 mm	0.63 in.
		d2	25 mm	0.98 in.
	B) with counter flexing	number of teeth, t1	15	
		d1	23.87 mm	0.94 in.
		d2	30 mm	1.18 in.
Belt width	maximum		100 mm	3.94 in.
Endless length	minimum		500 mm	19.69 in.
Manufacturing length	standard		100000 mm	328.08 ft.

Reference images


Side view

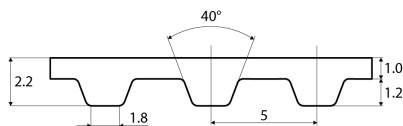

A) without counter flexing



B) with counter flexing



Fabrication

This information on the fabrication options is general, please contact Ammeraal Beltech for the specific fabrication possibilities of the timing belt of your choice.

Open end, prepared splice, spliced endless with mechanical fastener or a pin joint fastener.

Cleats welded or mechanically attached, metal teeth, guides welded or glued.

Covers can be welded, glued, coated or vulkanized onto the back side of the timing belt.

Thermoplastic covers can be embossed. Perforations, lateral and longitudinal slots, lateral and longitudinal profiles.

Additional Information

Tooth profile according to standard: metric ISO 17396 , imperial ISO 5296-1, curvilinear ISO 13050, depending on the belt type.

This sheet contains typical values, which apply to a temperature of approx. 20 °C (68 °F), unless otherwise stated, individual data may differ.

Consult our specialists for further information like technical calculations. Instructions regarding joining, storage & maintenance and tracking & tensioning.

Standard belt width [mm]	Allow. tensile load Linear open end & Torque [N]	Allow. tensile load Linear welded endless [N]	Spring force [N]
10	430	215	75000
16	610	305	135000
25	980	490	210000
32	1140	570	260000
50	1800	900	409000
75	2700	1350	590000
100.1	3600	1800	780000

Speed rpm [1/min]	Specific tooth force [N/mm]	Specific power [W/mm]
0	2.452	0
25	2.36	0.005
50	2.274	0.009
75	2.23	0.014
100	2.175	0.018
150	2.105	0.026
200	2.05	0.034
300	1.955	0.049
400	1.867	0.062
500	1.815	0.076
750	1.697	0.106
1000	1.626	0.136
1250	1.56	0.163
1500	1.5	0.188
1750	1.448	0.211
2000	1.403	0.234
3000	1.265	0.316
4000	1.166	0.389

Standard