

PU Torque T5 Steel NT

Article code: TBUT100200

General information

Productgroup	Timing belts, PU Torque
Industry segment	General industry; Container & packaging; Paper & print
Main product feature	Low friction tooth side, Positive drive, Wear resistant bottom side

Belt construction

Tension member		steel
Material	body	Polyurethane
Surface	tooth side	Polyamide fabric
	back side	Polyurethane

Characteristics


Food Grade (FG)	no	
Antistatic (AS)	no	
Oil & Fat resistance	yes	

Technical data


Tooth	profile		T5	
	pitch		5 mm	0.2 in.
Hardness body material	ISO 868		92A Shore	
Belt thickness			2.3 mm	0.09 in.
Belt weight			2.1 kg/m ²	0.43 lbs/ft ²
Coefficient of friction	tooth side to steel	dynamic	0,3	
Operating temperature	continuous	from / to	-10 / 80 °C	14 / 176 °F
Minimum pulley diameter	A) without counter flexing	number of teeth, t1	10	
		d1	15.05 mm	0.59 in.
		d2	30 mm	1.18 in.
	B) with counter flexing	number of teeth, t1	15	
		d1	23.05 mm	0.91 in.
		d2	30 mm	1.18 in.
Belt width	maximum		100 mm	3.94 in.
Belt length	minimum		900 mm	35.43 in.
	maximum		25000 mm	82.02 ft.

Reference images


Side view

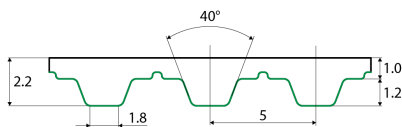

A) without counter flexing



B) with counter flexing



Fabrication

This information on the fabrication options is general, please contact Ammeraal Beltech to inquire for the specific fabrication possibilities of the timing belt of your choice.

Cleats welded or mechanically attached, metal teeth, guides welded or glued.

Covers can be welded, glued, coated or vulkanized onto the back side of the timing belt.

Thermoplastic covers can be embossed.

Perforations, lateral and longitudinal slots, lateral and longitudinal profiles.

Additional Information

Tooth profile according to standard: metric ISO 17396 , imperial ISO 5296-1, curvilinear ISO 13050, depending on the belt type.

This sheet contains typical values, which apply to a temperature of approx. 20 °C (68 °F), unless otherwise stated, individual data may differ.

Consult our specialists for further information like technical calculations. Instructions regarding joining, storage & maintenance and tracking & tensioning.

Standard belt width [mm]	Allow. tensile load Linear open end & Torque [N]	Allow. tensile load Linear welded endless [N]	Spring force [N]
10	390	195	90000
16	550	275	142500
25	910	455	225000
32	1100	550	285000
50	1690	845	450000
75	2400	1200	675000
100.1	3200	1600	900000

Speed rpm [1/min]	Specific tooth force [N/mm]	Specific power [W/mm]
0	2.452	0
25	2.36	0.005
50	2.274	0.009
75	2.23	0.014
100	2.175	0.018
150	2.105	0.026
200	2.05	0.034
300	1.955	0.049
400	1.867	0.062
500	1.815	0.076
750	1.697	0.106
1000	1.626	0.136
1250	1.56	0.163
1500	1.5	0.188
1750	1.448	0.211
2000	1.403	0.234
3000	1.265	0.316
4000	1.166	0.389

Standard