

# PU Moulded AT10 -530 Steel

Article code: TBUM000426

## General information

|                             |  |
|-----------------------------|--|
| <b>Productgroup</b>         | Timing belts, PU Moulded                                   |
| <b>Industry segment</b>     | General industry; Container & packaging; Wood: Panel board |
| <b>Main product feature</b> | Positive drive, Non-marking, Wear resistant                |

## Belt construction

|                       |                   |              |
|-----------------------|-------------------|--------------|
| <b>Tension member</b> |                   | steel        |
| <b>Material</b>       | <b>body</b>       | Polyurethane |
| <b>Surface</b>        | <b>tooth side</b> | Polyurethane |
|                       | <b>back side</b>  | Polyurethane |

## Characteristics


|                                 |     |
|---------------------------------|-----|
| <b>Food Grade (FG)</b>          | no  |
| <b>Antistatic (AS)</b>          | no  |
| <b>Oil &amp; Fat resistance</b> | yes |

## Technical data


|                                |                            |                     |             |             |
|--------------------------------|----------------------------|---------------------|-------------|-------------|
| <b>Tooth</b>                   | profile                    |                     | AT10        |             |
|                                | pitch                      |                     | 10 mm       | 0.39 in.    |
| <b>Hardness body material</b>  | ISO 868                    |                     | 85A Shore   |             |
| <b>Belt thickness</b>          |                            |                     | 4.5 mm      | 0.18 in.    |
| <b>Coefficient of friction</b> | tooth side to steel        | dynamic             | 0,5         |             |
| <b>Operating temperature</b>   | continuous                 | from / to           | -10 / 80 °C | 14 / 176 °F |
| <b>Minimum pulley diameter</b> | A) without counter flexing | number of teeth, t1 | 15          |             |
|                                |                            | d1                  | 45.9 mm     | 1.81 in.    |
|                                |                            | d2                  | 50 mm       | 1.97 in.    |
|                                | B) with counter flexing    | number of teeth, t1 | 25          |             |
|                                |                            | d1                  | 77.73 mm    | 3.06 in.    |
|                                |                            | d2                  | 120 mm      | 4.72 in.    |
| <b>Belt width</b>              | maximum                    |                     | 400 mm      | 15.75 in.   |
| <b>Belt length</b>             |                            |                     | 530 mm      | 20.87 in.   |

## Reference images


### Side view

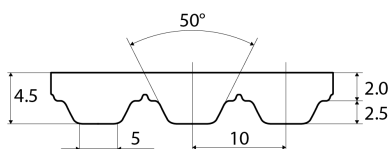

### A) without counter flexing



### B) with counter flexing



## Fabrication

This information on the fabrication options is general, please contact Ammeraal Beltech to inquire for the specific fabrication possibilities of the timing belt of your choice.

Cleats welded or mechanically attached, metal teeth, guides welded or glued.

Covers can be welded, glued, coated or vulkanized onto the back side of the timing belt.

Thermoplastic covers can be embossed.

Perforations, lateral and longitudinal slots, lateral and longitudinal profiles.

## Additional Information

Tooth profile according to standard: metric ISO 17396 , imperial ISO 5296-1, curvilinear ISO 13050, depending on the belt type.

This sheet contains typical values, which apply to a temperature of approx. 20 °C (68 °F), unless otherwise stated, individual data may differ.

Consult our specialists for further information like technical calculations. Instructions regarding joining, storage & maintenance and tracking & tensioning.



**Standard**